



Duplo

DC-618

Slitter/Cutter/Creaser

DC-618 SPECIFICATIONS

Speed	Up to 23 pages per minute (8.5"x 11" 2 cuts, 1 crease and REG off)
Input Paper Size	8.26" x 8.26" to 13" x 39.3" (210 mm x 210 mm to 330.5 mm x 1,000 mm ¹)
Min. Finished Size	1.89" x 1.97" (48 mm x 50 mm)
Tolerance	± 0.3 mm business cards; ± 0.2 mm on programmed position
Feeder Capacity	3.9" (100 mm)
Paper Weight	110 - 400 gsm
Slits	6 per sheet
Cuts	30 per sheet
Creases	20 per sheet
Memory	250 jobs using the control panel
Standard Features	Air knife, card stacker, fan registration, automatic gutter slit deflectors, crease depth and width adjustment, ultrasonic double feed detection sensor, CCD scanner, PC Controller software, PC pole mount, long paper tray, and LCD control panel
Options	PC and PC Arm, side air, perforation module (coming end of 2019), 48" long conveyor stacker
Power Requirements	120v 50/60 Hz
Dimensions (WxDxH)	67" x 32" x 44" (1,690mm x 810 mm x 1,125 mm)
Weight	375 lbs. (170 kg)

* Must purchase PC Arm

¹ Length is 29.5" (750 mm) when using standard long paper feed tray.

Production rates are based on optimal conditions and may vary depending on stock and environmental conditions. As part of our continuous product improvement program, specifications are subject to change without notice.

Duplo USA Corporation

3050 S. Daimler Street, Santa Ana, CA 92705 (949) 752-8222 (800) 255-1933 (949) 851-3054 fax www.duplousa.com

All rights reserved. No part of this document may be produced without permission of Duplo USA Corporation.

0919AO



All-in-One Finishing for Full-Bleed Applications

DC-618 Slitter/Cutter/Creaser

The fully automated DC-618 Slitter/Cutter/Creaser is Duplo's compact yet powerful all-in-one finishing solution designed for today's digital printer. With the ability to process up to 6 slits, 30 cuts and 20 creases in one pass, the DC-618 delivers full-bleed applications up to 23 sheets per minute without the white borders and toner cracking for a clean finish. Produce an array of on demand applications with ease including 24-up business cards, gate-fold invitations, direct mailers, brochures, book covers, and so much more. Bring your finishing in-house!

Newly Enhanced PC Controller Software

Duplo has revamped the look and feel of the PC Controller interface and it's one of the newest features included with the DC-618. With the software loaded on a PC station (sold separately), both new and experienced operators can program jobs with ease, make quick adjustments, and save an unlimited number of jobs onto the hard drive for instant changeovers. Operators can alternatively use the color LCD control panel for set up and use it



to save up to 250 jobs onto the built-in memory.



DC-618 shown with optional PC and PC arm.


Duplo's Signature Feed System

With a 3.9" (100 mm) capacity stacker and air suction belt feed system, the DC-618 ensures a consistent and productive operation. Two fans provide the air suction and sheet separation while the air knife delivers air flow to the stack to reduce static between the printed applications. The system feeds from the top of the stack to minimize scuffing and marking on the sheets. The ultrasonic double feed sensor detects when two or more sheets have been fed and automatically sends rejects to the reject tray. The DC-618 comes included with a 29.5" long paper tray and a side air option is available to provide additional air for longer sheet sizes.

Precision Finishing Second to None

The DC-618 comes equipped with rotary slitters, a guillotine cutter and a depth-adjustable creaser, offering the versatility of multiple devices without the manual and time-consuming set ups. Margins are trimmed horizontally by the slitter and vertically by the cutter and are automatically deposited into the waste bin. Only the finished pieces are delivered on the exit tray. The card stacker keeps smaller pieces, such as business cards and postcards, neatly stacked and can be removed when running larger applications.

Creasing digitally-printed output prior to folding prevents toner cracking and unattractive fold lines. The creaser utilizes male and female matrix channels to create a hinge along the sheet to be folded with ease. Creasing performance can be optimized by using the adjustable 3-step depth crease and the new creasing width tool for thicker stock. The DC-618 can handle substrates from 110 to 400 gsm.

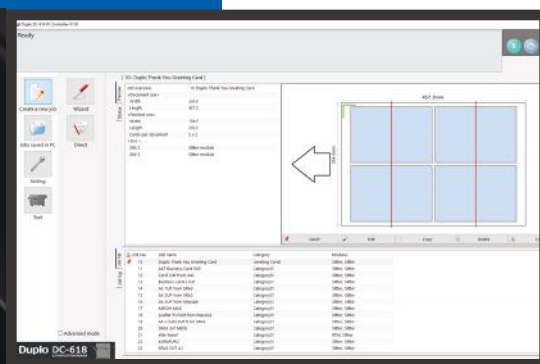

Automatic Barcode and Registration Mark Scanner

The built-in CCD scanner, a staple in Duplo's line of Slitter/Cutter/Creasers, can be used to recall any job stored in memory simply by reading the printed barcode and perform changeovers automatically. The scanner can also read REG marks and compensate for the sheet-by-sheet image shift in both horizontal and vertical directions at up to 19 sheets per minute, ensuring precision finishing every time.

Automated Prepress & Finishing with EFI Fiery Print Servers

Save up to 70% in set up time by automating job preparation and eliminating manual data entry with Fiery Impose® in Fiery Driven™ print environments. For common jobs, such as business cards and greeting cards, Duplo provides imposition templates to use in Fiery Impose that match the finishing templates on the DC-618. For custom layout jobs, create a new layout file on the PC Controller, import it into Fiery Impose and instantly see a preview of the finishing lines to verify job designs before printing. This integration offers timesaving workflows, reduces errors, and accelerates turnaround times. For more information, download the how-to guides and templates at fiery.efi.com/htg-impose-duplo.

Finish Full Bleed Applications On Demand

- 24-up business cards
- Postcards
- Greeting cards
- Invitations
- And much more!
- Brochures
- Menus
- Direct mail pieces
- Book covers



- Up to 23 sheets per minute
- Paper weight up to 400 gsm
- Up to 6 slits, 30 cuts & 20 creases
- 3.9" feed capacity stacker
- Enhanced PC Controller software
- Barcode & REG mark scanner